


COMMERCIAL
CONTROL
VALVES

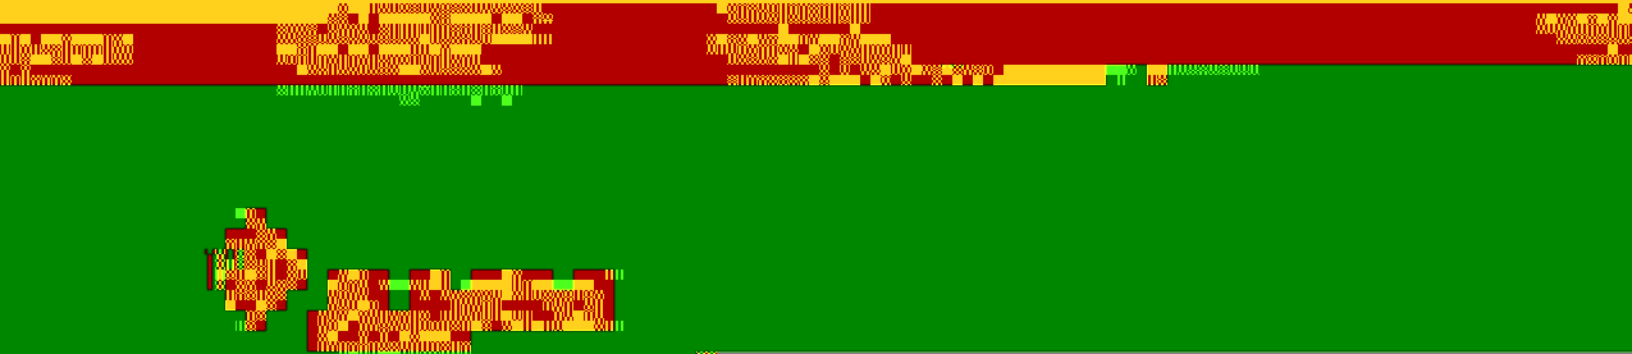

Specifications

Electrical



Controller Operating Voltage	12 Volt – AC (Requires use of Pentair Water®-supplied transformer)
Input Supply Frequency	50 or 60 Hz (Controller configuration dependent)
Motor Input Voltage	12 Volt – AC
Controller System Power Consumption	3 Watts average

Transformer – All Controllers

All Controllers require the use of a Pentair Water-supplied transformer.

Transformer Output Voltage	12 Volt – AC 400mA
Transformer Input Options	115 Volt – AC 50/60 Hz; 230 Volt – AC 50/60 Hz; 100 Volt – AC 50/60 Hz
Transformer Plug Options	Indoor North American Plug  Taiwan/Korea Plug  Outdoor North American (UL Listed for outdoor use)  Australian Plug  Japanese Plug  United Kingdom Plug  Mainland Europe Plug 


Addition: 

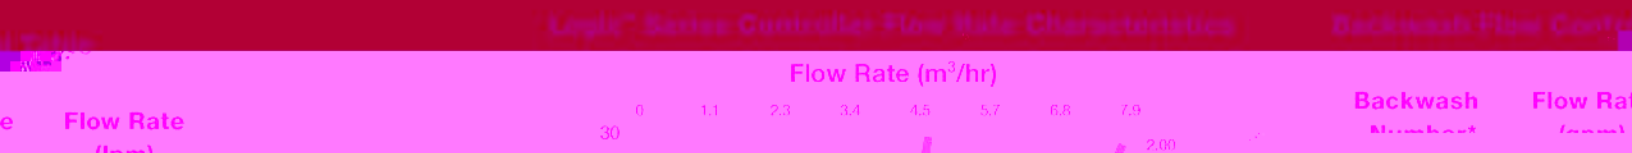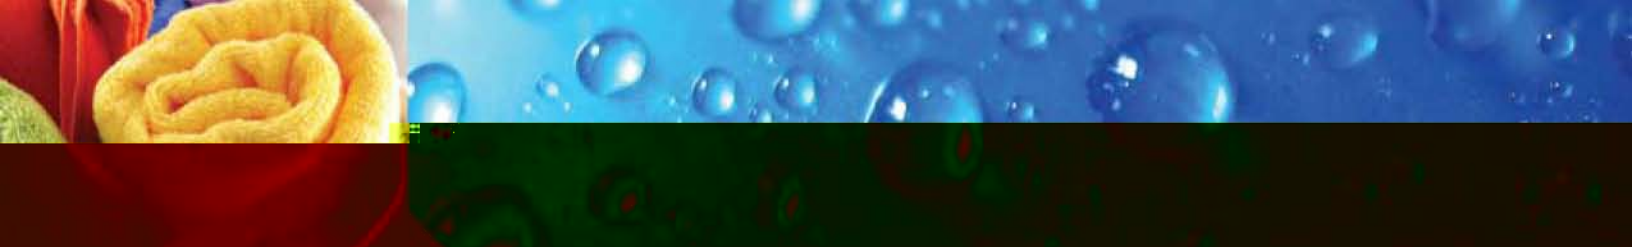





Injector* Performance

Logix™ Series Controllers

Injector "H" (Light Purple)
For 9-inch Tanks

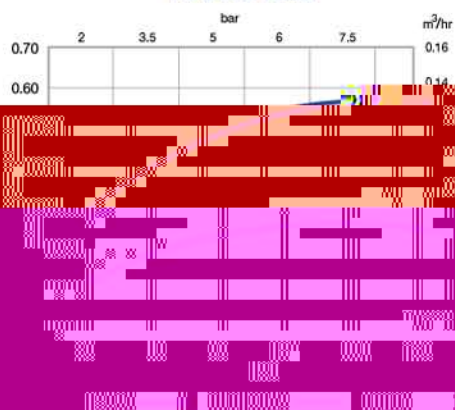

Injector "J" (Light Blue)
For 10-inch Tanks

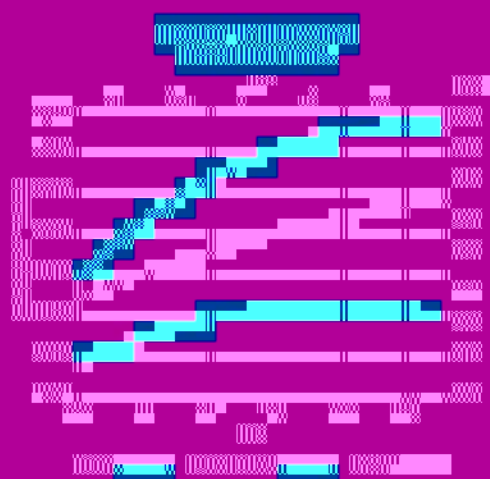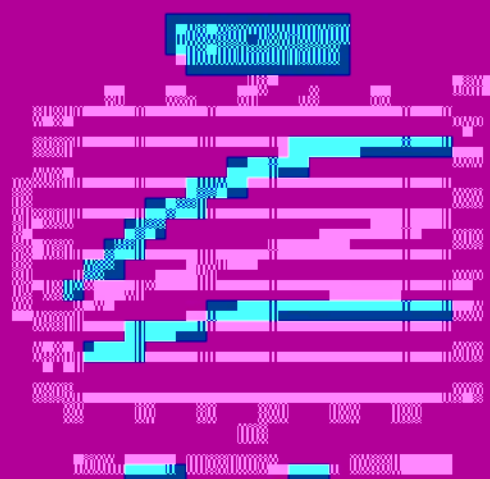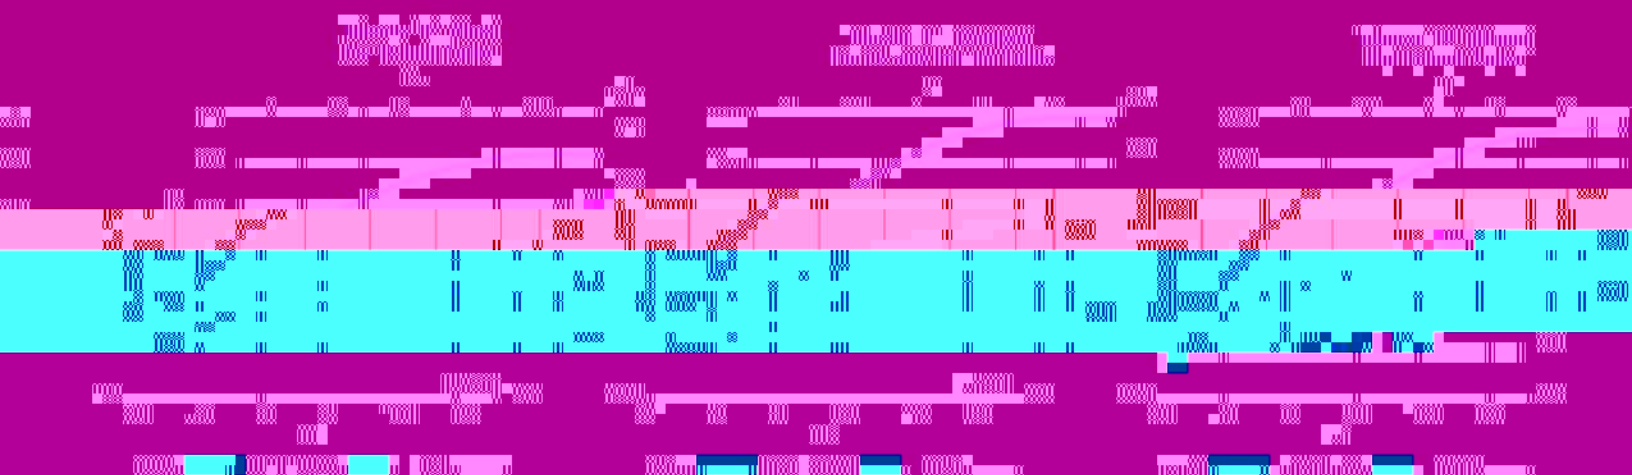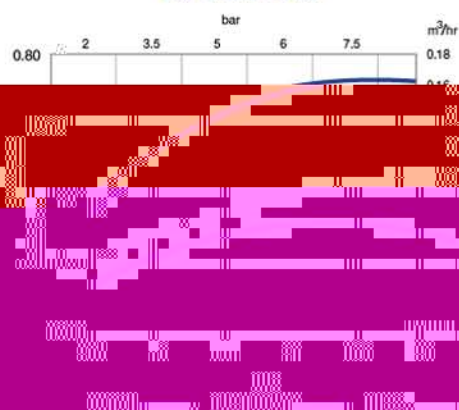

Logix™ Series Controllers



Logix™ Series Controllers

Logix™ Series Controllers

Logix™ Series Controllers

Logix™ Series Controllers